


SPECIFICATION

Power Supply	:	230Vac, 50Hz
Switch Action	:	2 x SPDT, type 1 B
Switch Rating	:	10 to 253Vac, 50/60Hz, min 10mA, max 10 (4) A
Timing Accuracy	:	±1 min/month
Power Reserve	:	3 months on fully charged battery
Max. number of switching operations	:	up to 200 ON or OFF operations per week
Enclosure Rating	:	IP30
Max. Ambient Temperature	:	45°C
Designed to meet	:	BS EN60730-2-7
Overall Dimensions (mm)	:	228 wide x 115 high x 50 deep
Control Pollution Situation	:	Degree 2
Ball Pressure Test	:	75°C
Rated Impulse Voltage	:	2.5kV

This product complies with the following EC Directives:
Electro-Magnetic Compatibility Directive.
 (EMC) (89\336\EEC), (92\31\EEC)
Low Voltage Directive.
 (LVD) (73\23\EEC), (93\68\EEC)

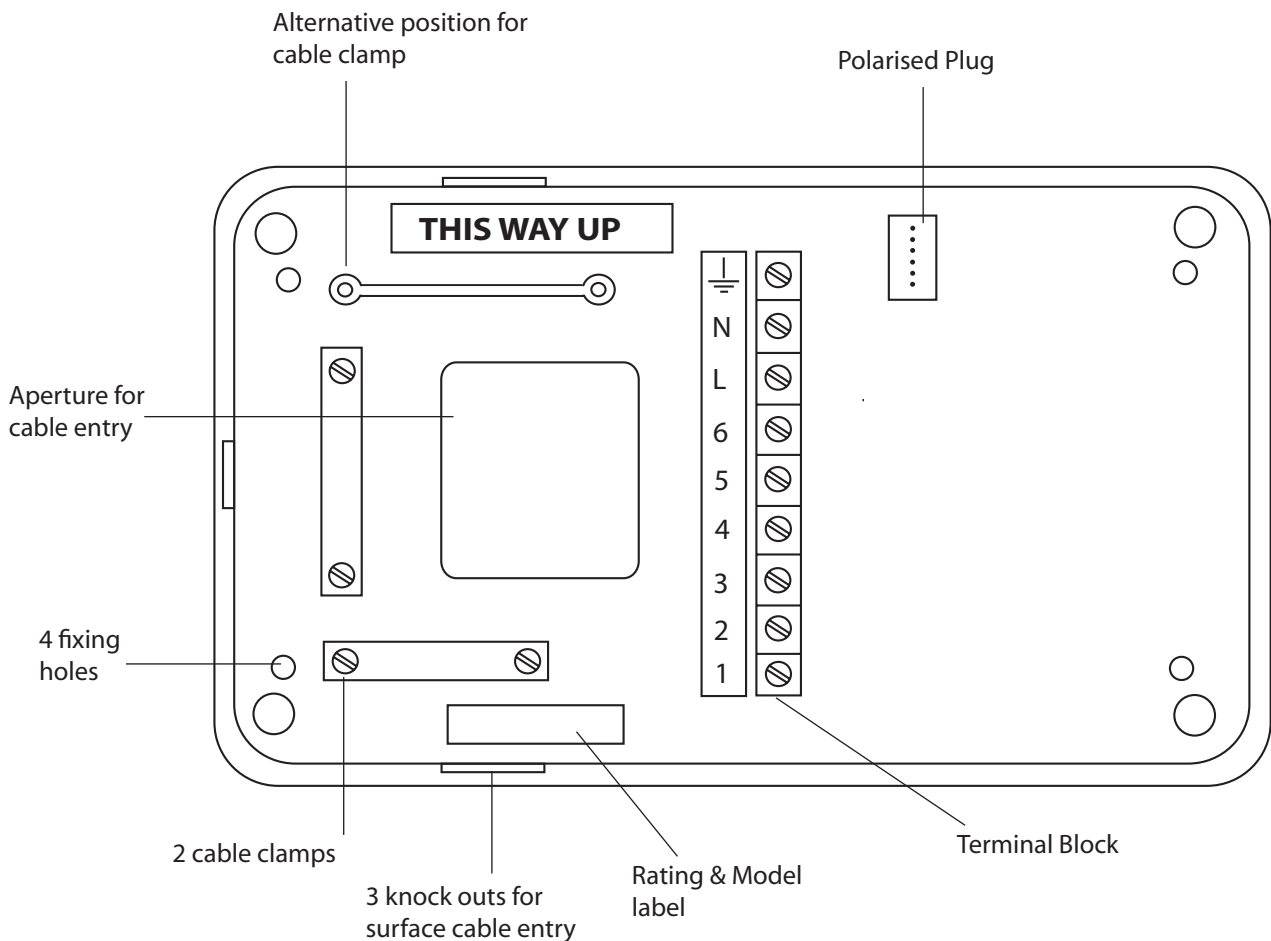

Danfoss Randall can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss Randall reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed.

Danfoss Randall Ltd,
 Amphill Road,
 Bedford MK42 9ER.
 Tel: (01234) 364621 Fax: (01234) 219705
 Email: danfosrandall@danfoss.com
 Website: www.danfoss-randall.co.uk

