

Instructions

VF, VFS, VRB, VRG



VF 2




VF 3



VFS 2




VRB, VRG




V-038.7/01
SIBC

AMV 323
VF 2/3, VFS 2 DN 15 - 50
VRB, VRG DN 15 - 50




MV-087.1/01

AMV 423, AMV 523
VF 2/3, VFS 2 DN 15 - 100
VRB, VRG DN 15 - 50




SIBC
MV-090.2/01

AMV(E) 15 / 16*
VF 2/3, VFS 2 DN 15 - 50 (32*)
VRB, VRG DN 15 - 50 (32*)




SIBC
MV-093.2/01

AMV(E) 25, 35
VF 2/3, VFS 2 DN 15 - 50
VRB, VRG DN 15 - 50




SIBC
MV-036.10/01

AMV(E) 55 / 56
VF 2/3 DN 65 - 150
VFS 2 DN 65 - 100




SIBC
MV-083.1/01


AMV(E) 85 / 86
VF 2/3 DN 125 - 150
VFS 2 DN 65 - 100




SIBC
MV-037.1/01




SIBC
MV-093.2/01

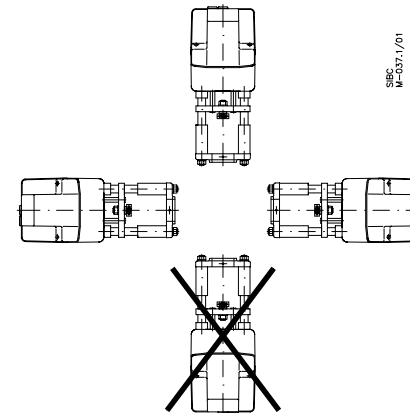

SIBC
MV-083.1/01






SIBC
MV-093.2/01

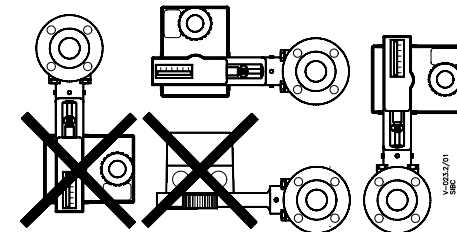


SIBC
MV-093.2/01

Instructions

VF, VFS, VRB, VRG

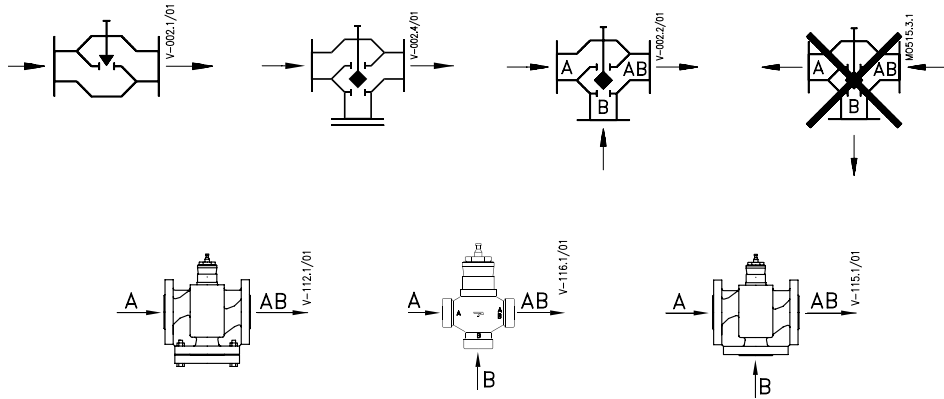

Application principle (VRB 3 only) Anwendungsbeispiel (nur VRB 3)

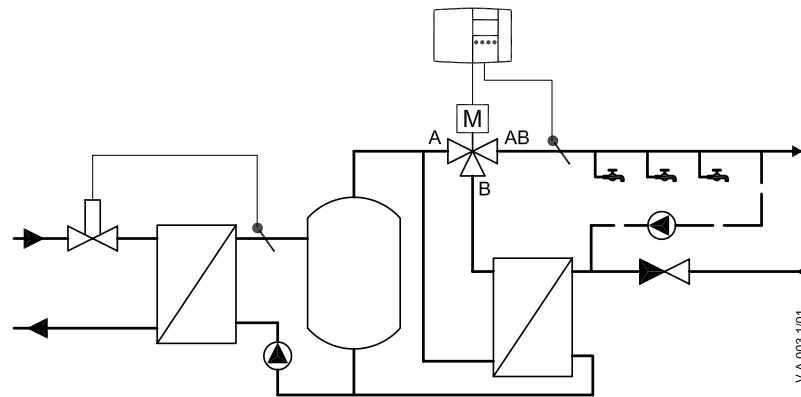

Note:

VRB 3 has DVGW approved (can only be used as 3-way mixing valve).

Bemerkung:


VRB 3 ist DVGW geprüft. (Kann nur als 3-Wege Mischventil verwendet werden.)

VRB / VRG 3

max. t: 120°C
min. t: 0°C

max. P: 16bar

max. P: 25bar




VF2 / VF3

max. t: 130°C (200°C)
min. t: 0°C

max. P: 16bar (13bar)

max. P: 25bar



VFS 2

max. t: 120°C (200°C)
min. t: 0°C

max. P: 25bar (20bar)

max. P: 40bar

